


# dbx MODEL 903 SCHEMATIC

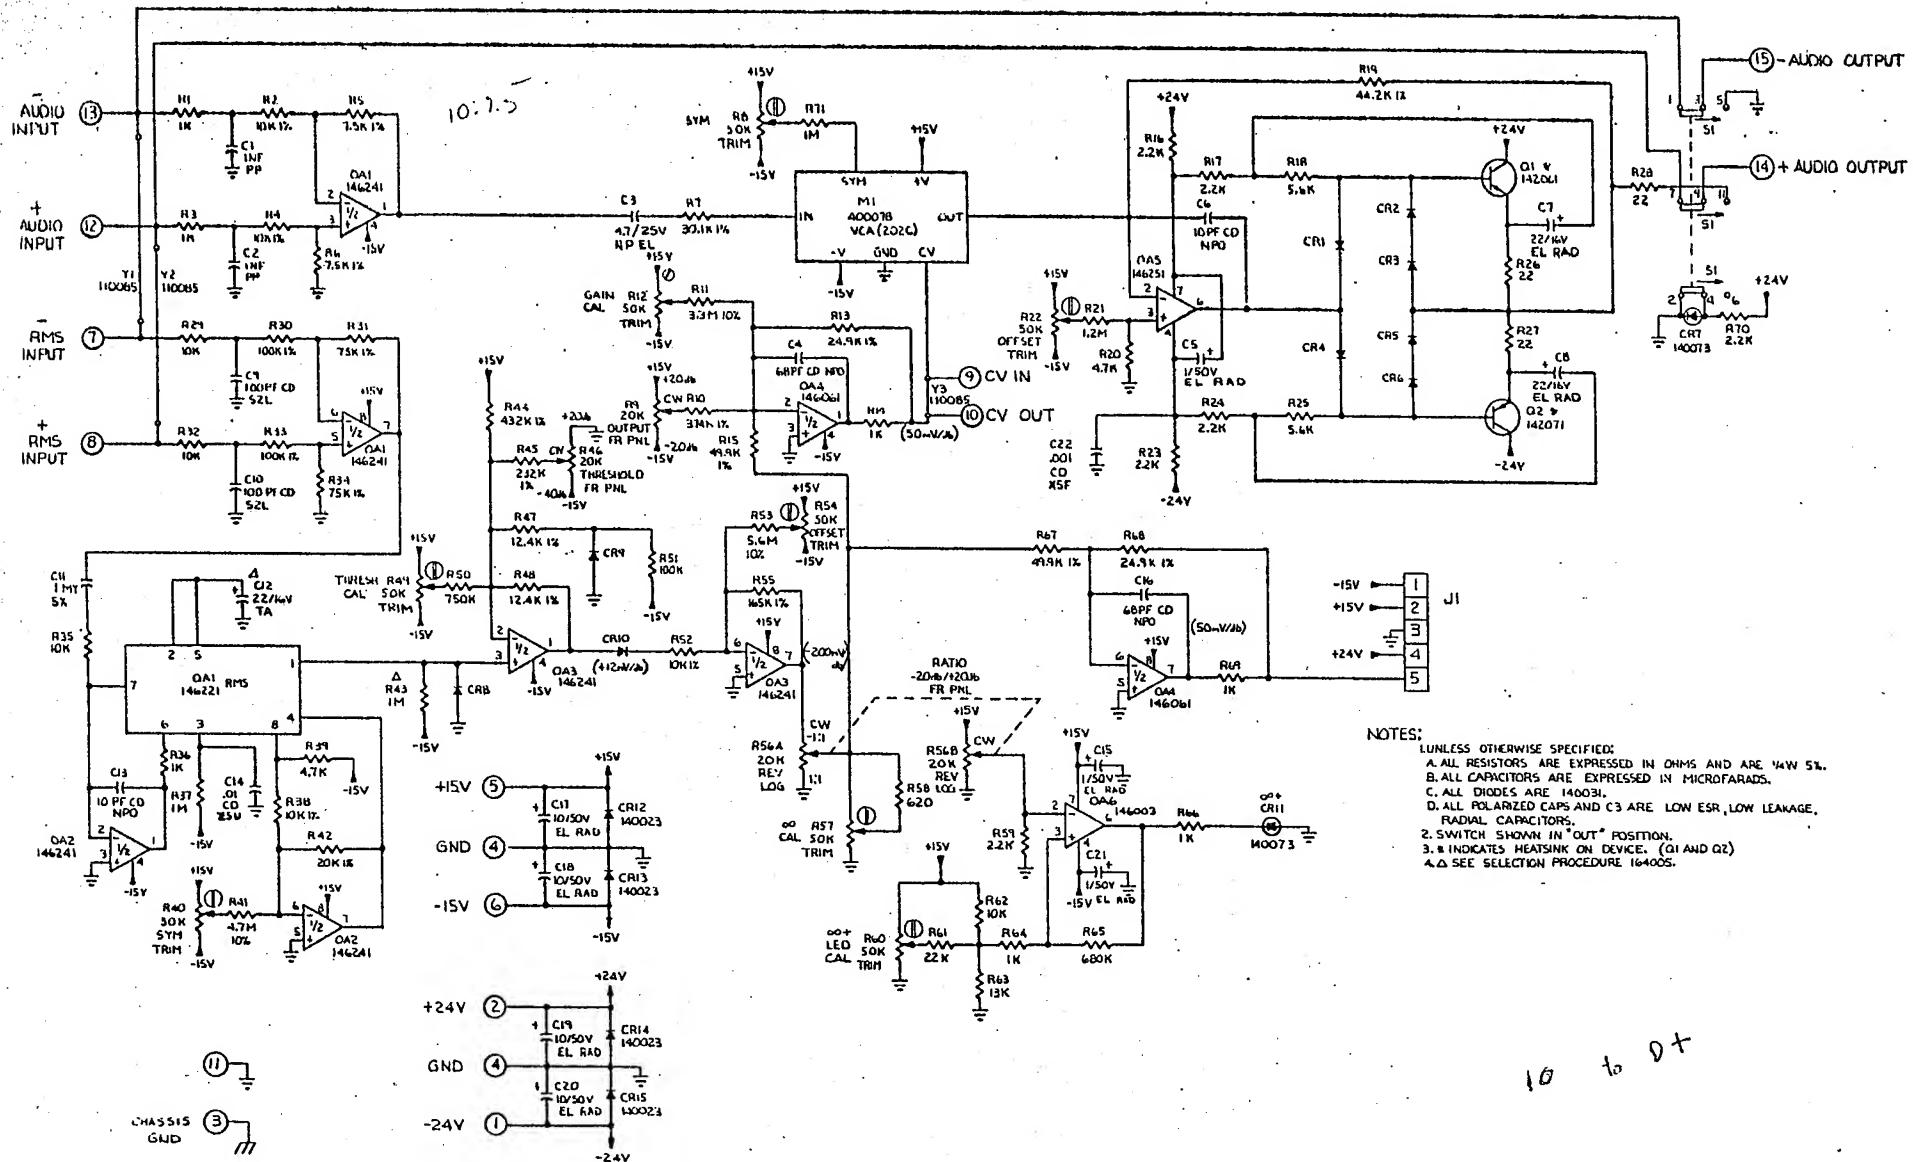


## NOTES:

- LUNLESS OTHERWISE SPECIFIED:  
 A. ALL RESISTORS ARE EXPRESSED IN OHMS AND ARE 1/4W 5%.  
 B. ALL CAPACITORS ARE EXPRESSED IN MICROFARADS.  
 C. ALL DIODES ARE 14003.  
 D. ALL POLARIZED CAPS AND C3 ARE LOW ESR, LOW LEAKAGE,  
 RADIAL CAPACITORS.  
 2. SWITCH SHOWN IN "OUT" POSITION.  
 3. \* INDICATES HEATSINK ON DEVICE. (Q1 AND Q2)  
 4.  $\Delta$  SEE SELECTION PROCEDURE 140005.

Manufactured under one or more of the  
 following U.S. patents: 3,681,618;  
 3,714,462; 3,789,143; 4,101,849; 4,097,767.  
 Other patents pending.

REF DESIGNATIONS	
LAST	NOT USED
R35	
C2	
CR1I	
OAB	
Q1	

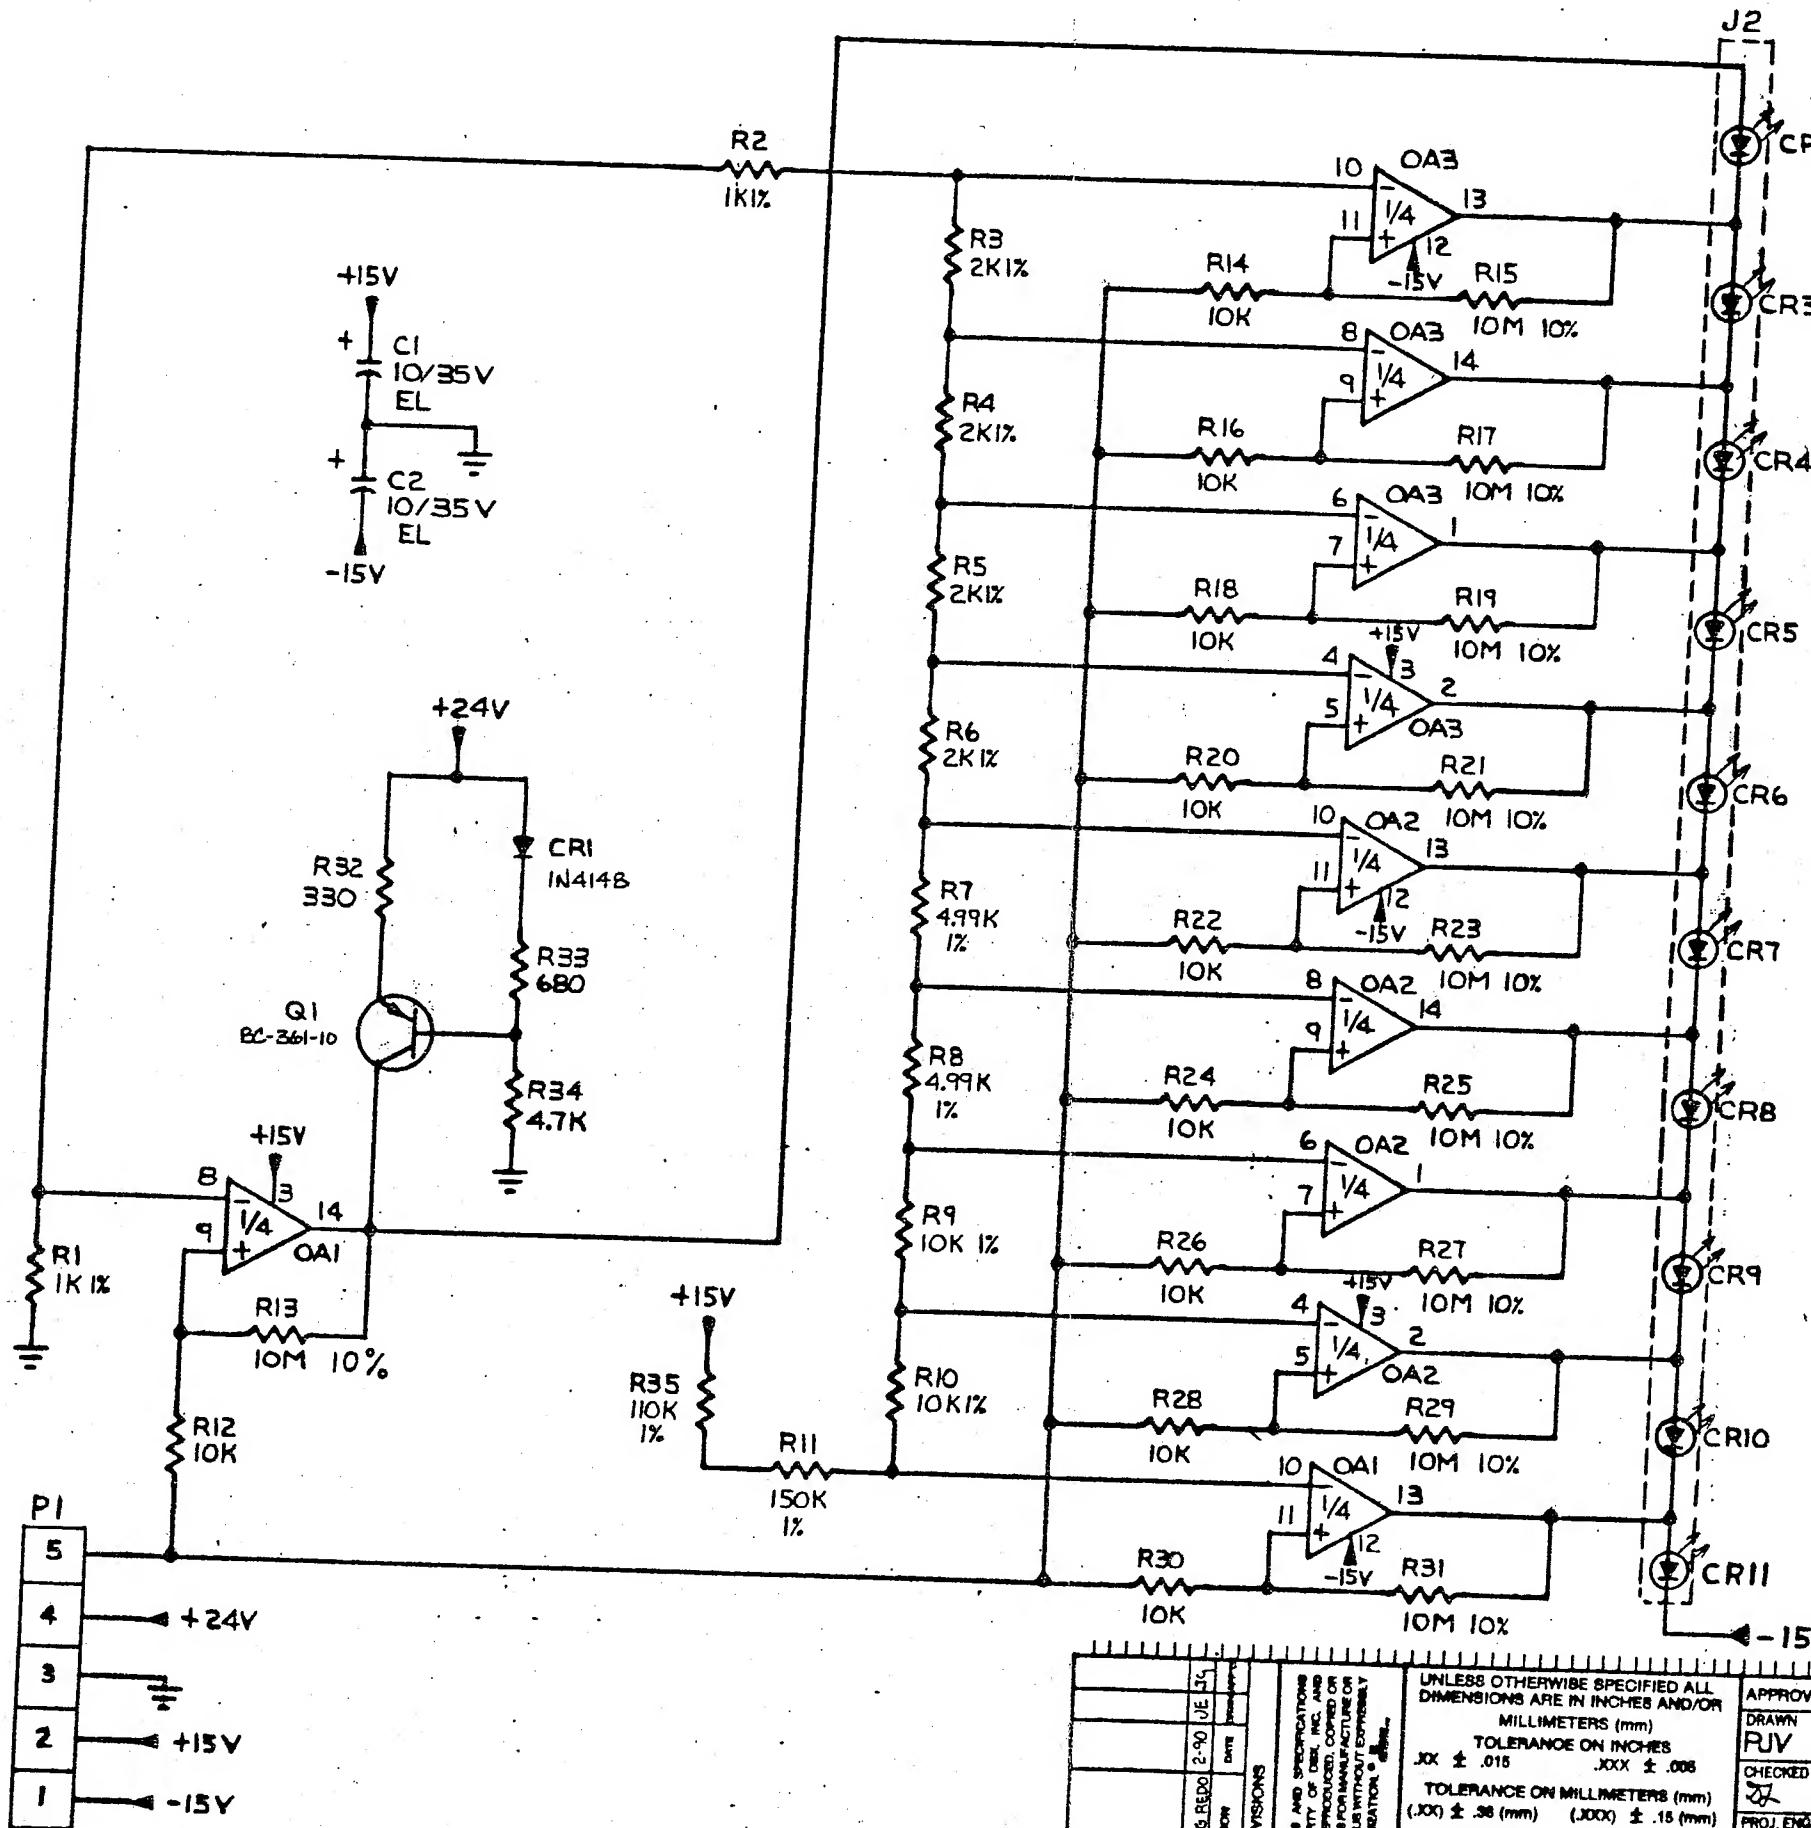

PRINTING AD-107-377B	DATE	APPROVAL	DATE	AKG ACOUSTICS
01-03-85, AND REDO 2-90	5/2/80	DRAWN	5/2/80	SCHEMATIC
REVISIONS	PUV	CHECKED	5/5/80	LED DISPLAY BOARD
JXX $\pm .015$	JXX $\pm .006$	PROJ. ENG.	6/24/80	
TOLERANCE ON MILLIMETERS (mm)	TOLERANCE ON INCHES	CH. ENG.		
(JXX) $\pm .38$ (mm)	(JXX) $\pm .15$ (mm)	C.T.B.		
ANGLES $\pm 1/2^\circ$	FRACTIONS $\pm 1/32$	RELEASED		
APPROVED FOR PRODUCTION TOOLING		SCALE		
APPR'D	DATE	REV		
C 61105-000 01				

